



1000 BAR / 115

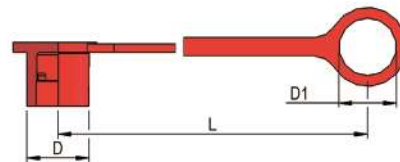

**Materiaal:** staal  
**Finish:** Zn-Fe (CR 3)  
**Standaard Seals:** NBR  
**Temperatuur bereik:** -35°C + 130°C  
**Werkdruk:** 1000 bar  
**Veiligheidsfactor:** 1 : 2,5  
**Onderdruk koppelen:** nee

BG	draad	WD bar	code	vrouwdeel	Ø mm	L mm	code	mandeel	Ø mm	L mm
1	1/4 BSP	1000	90003146	SKF-115-1000-04-04BFF	28	61,3	90003147	SKM-115-1000-04-04BFF	14,9	38,1
1	1/4 NPT	1000	90003148	SKF-115-1000-04-04NF	28	58,3	90003149	SKM-115-1000-04-04NF	14,9	35,7

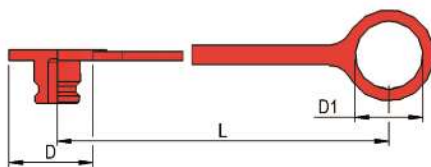

Stofkappen/pluggen

BG	code	stofplug	Ø mm	L mm	code	stofkap	Ø mm	L mm
1	o.a.	TSKF-115-04-DP	29	110	o.a.	TSKM-115-04-DC	29	110


Uitwisselbaar met: DNP PCJ5, Ceijn 115

1500 BAR / 116



**Materiaal:** staal  
**Finish:** Zn-Fe (CR 3)  
**Standaard Seals:** NBR  
**Temperatuur bereik:** -35°C + 130°C  
**Werkdruk:** 1500 bar  
**Veiligheidsfactor:** 1 : 2,5  
**Onderdruk koppelen:** nee

BG	draad	WD bar	code	vrouwdeel	Ø mm	L mm	code	mandeel	Ø mm	L mm
1	1/4 BSP	1500	90003150	SKF-116-1500-04-04BFF	28	61,3	90003152	SKM-116-1500-04-04BFF	14,9	38,1
1	1/4 NPT	1500	90003154	SKF-116-1500-04-04NF	28	58,3	90003156	SKM-116-1500-04-04NF	14,9	35,7

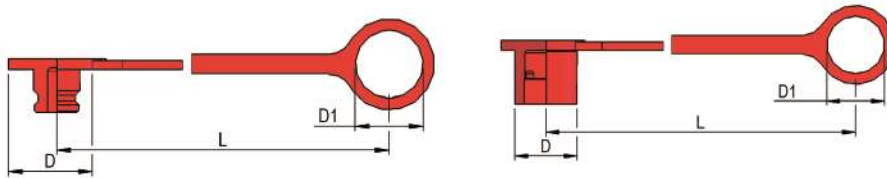

Stofkappen/pluggen

BG	code	stofplug	Ø mm	L mm	code	stofkap	Ø mm	L mm
1	90003157	TSKF-116-04-DP	29	110	90003158	TSKM-116-04-DC	29	110

Uitwisselbaar met: DNP PCJ6, Ceijn 116